

Sizing, Installation, Dimensions and Weight

GOLD PX, plate heat exchanger, size 11




DELIVERY AND TRANSPORT WITHIN THE SITE

The GOLD PX 11 is always supplied as one unit. The air handling unit can be split into multiple sections to facilitate transporting it within the building site.

The multiple sections are joined together by bolts and the electrical and control cables between the sections have quick-fit connectors. The air handling unit is delivered on wooden pallets.

The electrical cabinet and the drain pipe on the front of the air handling unit can be removed, if required, for transporting the unit within the building site.


A: Specify right-hand or left-hand version when ordering.

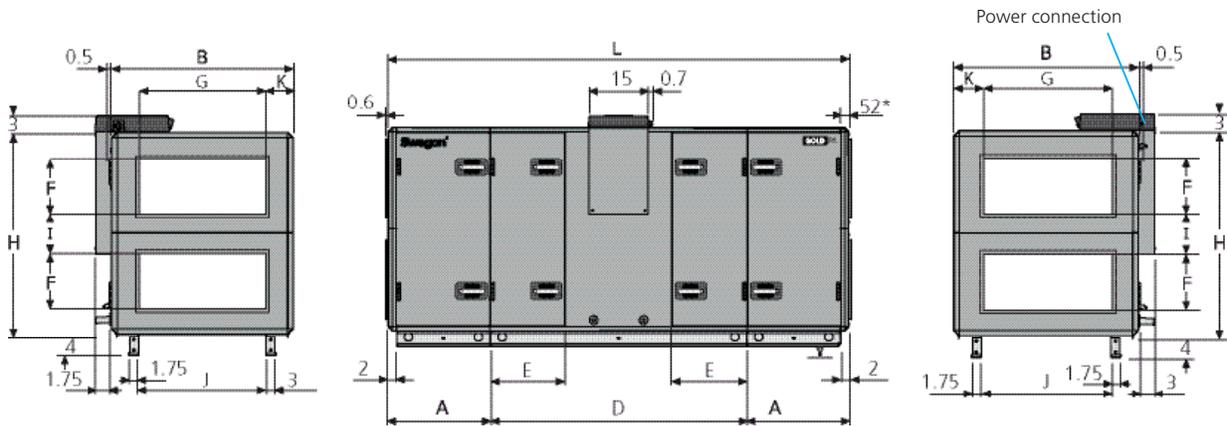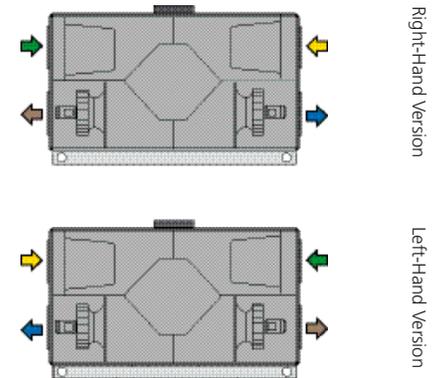

If a water trap (accessory) is fitted, the air handling unit must be raised at least 2 inches to provide space for the water trap. Support feet (accessories) can be used for this purpose. *The air handling unit is supplied without end connection panel if a duct accessory housed in an insulated casing will be connected.*

Size	A	B	D	E	F	G	H	I	J	K	L	Wgt (lb)	Airflow ERV	Airflow CWC
PX 11	25.5	47.2	64.2	18.5	18.0	32.0	51.0	7.5	37.5	7.6	115.2	1571-1769	2300 cfm	2300 cfm*

*based on 550 fpm

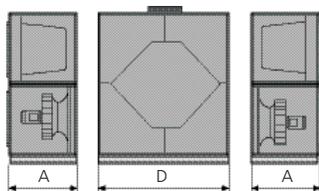

DIVISION INTO SECTIONS FOR TRANSPORT

The unit can be divided into three sections at the building site.

Dimensions: See A and D in the table above.

Weight: A = 297-385 lbs, D = 977-1518 lbs.

CLEAR SPACE FOR INSPECTION

A clear space of 36 inches should be provided in front of the unit and at least 8 inches should be provided above the junction hood.

Power Connection	
	230/1/60
FLA	11.43
MCA	12.81
RFS	15