

Sizing, Installation, Dimensions and Weight

GOLD PX, plate heat exchanger, size 12



DELIVERY AND TRANSPORT WITHIN THE SITE

The GOLD PX 12 is always supplied as one unit. The air handling unit can be split into multiple sections to facilitate transporting it within the building site.

The multiple sections are joined together by bolts and the electrical and control cables between the sections have quick-fit connectors. The air handling unit is delivered on wooden pallets.


The electrical cabinet and the drain pipe on the front of the air handling unit can be removed, if required, for transporting the unit within the building site.

A: Specify right-hand or left-hand version when ordering.

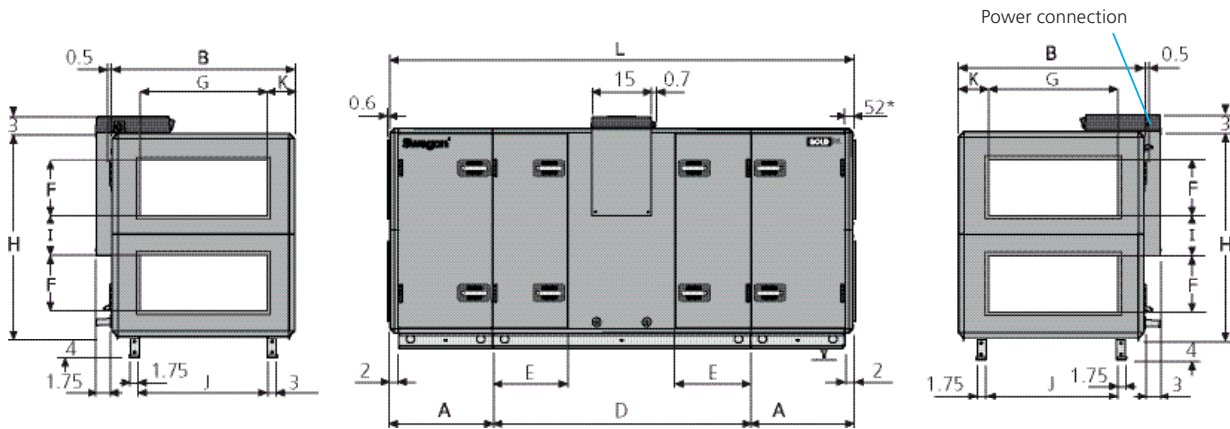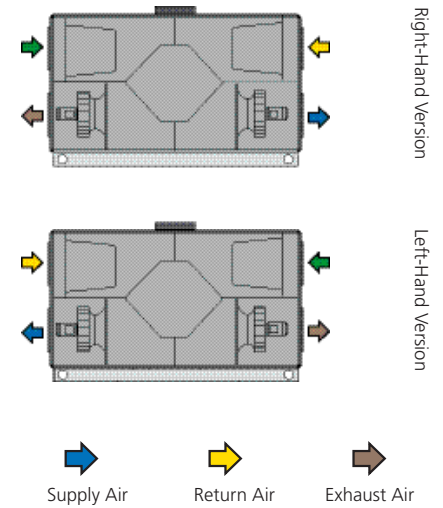

Size	A	B	D	E	F	G	H	I	J	K	L	Wgt (lb)	Airflow ERV	Airflow CWC
PX 12	25.5	47.2	47.2	18.5	18.5	32.0	51.0	7.5	37.5	7.6	115.2	1619-1830	2850 cfm	2480 cfm*

*based on 550 fpm



DIVISION INTO SECTIONS FOR TRANSPORT

The unit can be divided into three sections at the building site.

Dimensions: See A and D in the table above.

Weight: A = 322-416 lbs, D = 977-999 lbs.

CLEAR SPACE FOR INSPECTION

A clear space of 36 inches should be provided in front of the unit and at least 8 inches should be provided above the junction hood.

Power Connection		
	460/3/60	575/3/60
FLA	7.4	5.8
MCA	8.3	6.5
RFS	15	15